

~~SECRET~~

02308

NPIC/TSSG/ESD/TEB-34-68  
24 December 1968

MEMORANDUM FOR: Chief, Development & Engineering Division, TSSG

25X1 ATTENTION:

THROUGH: Chief, TEB/ESD/TSSG/NPIC  
Chief, ESD/TSSG/NPIC — *70 Dec/26 Dec 1968*

SUBJECT: Interim Test Report on the MonoRad, R&D Project No. 02308

25X1 REFERENCES:

\*Test Plan - dated 22 October 1968

### 1. INTRODUCTION


25X1 1.1. The Monocular Rapid Alignment Device (MonoRad) was built by the  This MonoRad was tested by TEB between 19 November 1968 and 18 December 1968. The contract specifications were used as a guide-line for the tests.

1.2. This interim test report has been written for your use until a final report can be published, as well as to confirm the verbal report of 19 December 1968. The final report will include the results of the operational suitability tests.

1.3. Due to the press of time to pay the contractor, the contract monitor and TEB agreed on 11 December 1968 to a reduced level and depth of acceptance testing. A large amount of time was saved by eliminating the optical performance tests of the MonoRad when mounted on the Zoom 70 instrument.

Declass Review by NGA.

~~SECRET~~



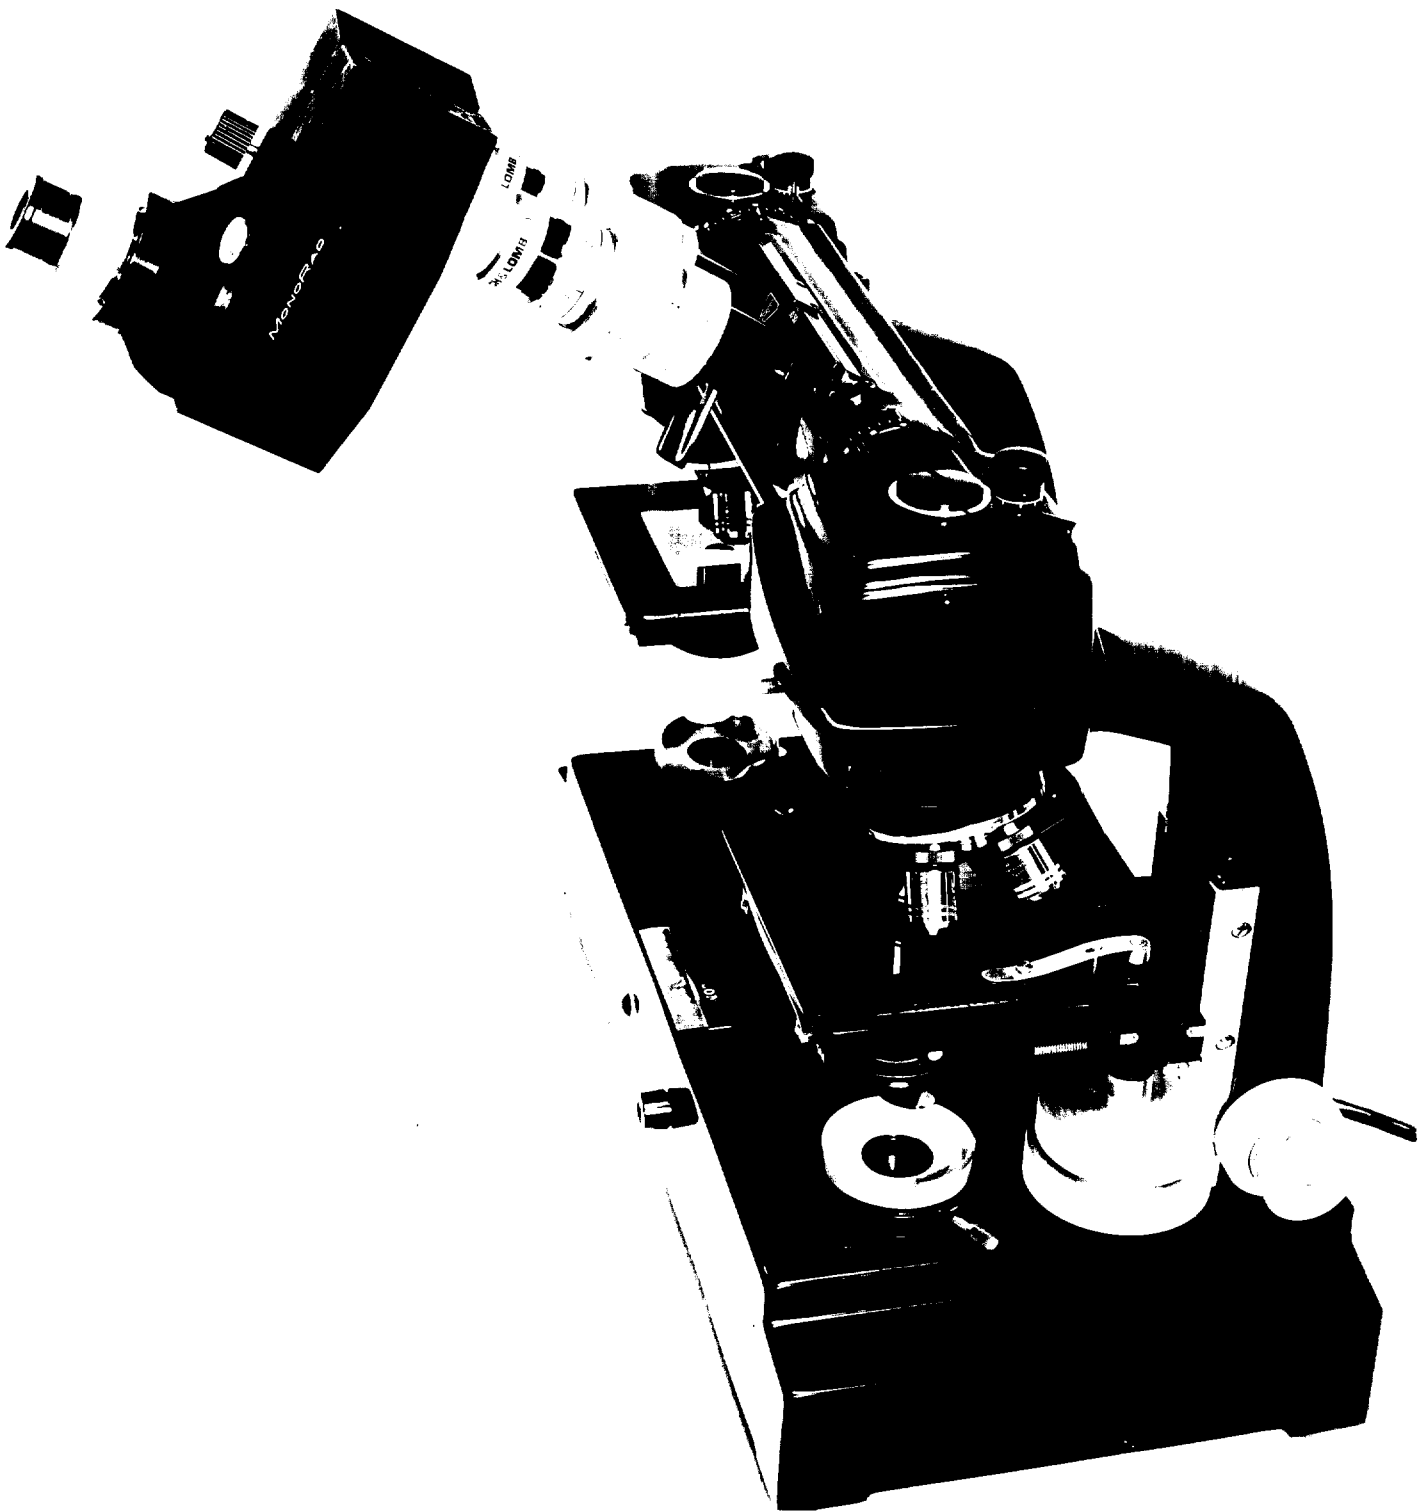


Figure 1 - MonoRad mounted on a HPS equipped with anamorphic eyepiece attachments.

~~SECRET~~2. TEST RESULTS(NOTE: The ☐ High Power Stereoviewer is referred to herein as HPS.)2.1. Physical Requirements:

<u>ITEM</u>	<u>TEST RESULTS</u>	<u>CONTRACTUAL REQUIREMENT</u>
Dimensions	7 $\frac{1}{4}$ " wide, 4 $\frac{3}{8}$ " min. height (excluding 1 $\frac{3}{16}$ " for a portion that fits into the microstereoscope eyepiece tube), 5 $\frac{1}{4}$ " deep.	7" wide, 4 $\frac{1}{2}$ " high, 4" deep.
Weight	3 lbs. 7.77 oz.	$\leq$ 3 $\frac{1}{2}$ lbs.
IPD Compatibility (Interpupillary distance)	The straight through IPD range of the MonoRad is 56 to 82+ mm. The HPS IPD range is 54 to 74 mm. and the MonoRad is compatible with this. the G.P. anamorphic attachment IPD range is 46 to 69 mm. and the MonoRad is compatible from only 62.5 to 69 mm.	50 to 75 mm.
Mechanical compatibility	The MonoRad is mechanically compatible with the specified eyepieces and anamorphic attachments. The <input type="checkbox"/> advanced anamorphic attachment could not be mounted on the Zoom 70, so DED waived this portion of the test.	<p><u>Eyepieces</u>  <input type="checkbox"/> 10X wide field, <input type="checkbox"/> 6X compensating or 10X compensating, wide field, high eye point.</p> <p><u>Anamorphic attachments</u></p> <div style="border: 1px solid black; height: 30px; width: 300px; margin-top: 5px;"></div>

25X1  
25X1~~SECRET~~

**SECRET**

<u>ITEM</u>	<u>TEST RESULTS</u>	<u>CONTRACTUAL REQUIREMENT</u>
Connection mechanism Disconnection mechanism	It requires moderate care and a few seconds to connect or disconnect the MonoRad.	Quick and Easy Quick and convenient
Focus adjustments	Three focus adjustments were provided. The full range of the channel focus knobs requires seventy (70) 360° turns.	In viewing eyepiece and both input tubes
Paint	The contractual requirement for finish appears to be what was provided.	Black semi-gloss enamel on all non-mating external surfaces.
Internal coating	The MonoRad was not disassembled. According to the drawings the non-Teflon, non-stainless steel, and non-Dynaco parts are generally black anodized. The input tubes are clear anodized. Many reflecting internal surfaces are visible through the input ports. See section 3.6.	Non-reflecting black material on all non-reflecting and non-transmitting internal surfaces.
Structural rigidity	Appears structurally rigid except for the two channel focusing shafts. The knobs wiggle back and forth very easily and it is possible to place the MonoRad on the table such that these knobs get banged. The 303 st.st. 0.1875 shaft rides in a 0.1876 2024-T4 aluminum hole that is only 0.156 inches deep per the drawings. During the acceptance testing reported here the MonoRad was mounted on the HPS 44 times and on the Zoom 70 five times. No optical misalignment due to jarring was observed.	Sufficient to withstand the jarring resulting from repeated disconnection and placement on convenient nearby surfaces. The optical elements shall <u>maintain alignment</u> .
Hardware	Most screws are 4-40 and the larger size threads are 1 1/4"-18NEF3 and 1 13/16-12UN3 both A and B. These are all American Standard.	Screws, bolts, etc. shall be of a minimum number of types and sizes. The sizes shall be American Standard.

**SECRET**

SECRET

<u>ITEM</u>	<u>TEST RESULTS</u>	<u>CONTRACTUAL REQUIREMENTS</u>
Surfaces	The aluminum and painted surfaces are judged satisfactory for corrosion resistance.	Corrosion susceptible surfaces are to be suitably treated.
Bearings	The only visible bearings are Teflon. There are several stainless steel shafts which ride directly in 2024-T4 aluminum.	Sealed bearings of the pre-lubricated type shall be used wherever possible.
Case	A storage case was provided. With a handle it would make a fine carrying case.	A carrying and/or storage case shall be provided.
Material	The drawings specify 2024-T4 aluminum which is a wrought material.	356 Al alloy castings.
<u>2.2. Optical Requirements:</u>		
Resolution ratio	The resolution ratios ranged from 0.40 to 0.89 with two out of 16 cases being within specs. Physically supporting the MonoRad improved the ratios (in one case to 1.00). See section 3.5.	Ratio of resolution with and without the MonoRad shall be $\geq 0.8$ .
Light levelratio	The light level ratios ranged from 0.079 to 0.087. The average per cent light transmission was 8.3%. See section 3.6.	Ratio of the sum of light levels through the eyepieces to that through the MonoRad shall be $\geq 0.4$ .
Field of view ratio (FOV)	For eight different optical settings the FOV ratio was 1.0 or greater.	Ratio of FOV diameter with and without the MonoRad shall be $\geq 0.95$ .
Defocusing	For four different optical settings connection and disconnection of the MonoRad caused no defocusing of either the HPS or the MonoRad.	No defocusing after connection or disconnection of the MonoRad.

SECRET

~~SECRET~~

<u>ITEM</u>	<u>TEST RESULTS</u>	<u>CONTRACTUAL REQUIREMENT</u>
Magnification	In the three out of four optical settings the magnification through the MonoRad was 90% of that through the HPS.	Shall not change the magnification range of the microstereoscope.  The Image will be relayed at unity magnification.
Orientation	An image rotation of 1 to 2° was measured through the green channel. None through the white channel.	Shall not change the orientation of the image.
Anamorphic	For two optical combinations there were no changes in the required anamorphic settings. Physical movement of the anamorphic magnification control was sometimes observed.	Connection and disconnection shall not change the anamorphic adjustment.
Color code	One channel is coded with a green filter. The other channel shows predominately the color of the illuminating light. The latter channel is called the white channel.	Each optical channel shall be color coded.
<u>2.3. Graphic Requirements:</u>		
Books	Test was waived.	Instruction books shall conform to good commercial practice
Drawings	N/A	None
<u>2.4. Human Factors:</u>		
Viewing height	The MonoRad can be mounted in an "up" and a "down" position. The "down" position does not significantly change the viewing height.	Comfortable

~~SECRET~~

<u>ITEM</u>	<u>TEST RESULTS</u>	<u>CONTRACTUAL REQUIREMENT</u>
Safety	No sharp edges or other safety hazards were found.	Sharp edges and corners shall be broken.
"Feel"	The two channel focusing knobs wobble as they rotate and even at maximum (200X) magnification seem to turn interminably before any noticeable change in focus occurs. See section 3.4.	Rotational resistance for correct operator "feel"
2.5. <u>Maintainability:</u>		
Alignment, etc.	Manuals state that the sealed unit should be returned for repair if it is not functional.	Special tools, fixtures, or instruments shall be considered part of the prototype MonoRad.

SECRET

3. ENGINEERING EVALUATION OBSERVATIONS:

3.1. Repeated connection and disconnection of the MonoRad a half dozen or so times caused the interpupillary distance setting on the HPS to change from 68mm to 60mm. This did not destroy the anamorphic settings obtained with the MonoRad.

3.2. Adjusting the anamorphic attachments unscrews the MonoRad input tube adapters if they are not firmly tightened.

3.3. If the MonoRad is stored on a table instead of in its case, it will suffer the least damage due to jarring if always placed on its back surface. (This is the hinged end).

3.4. The fine focus knobs in the white and green color coded channels have a range of 70 full 360° turns, and require many turns to obtain any noticeable change in focus. It is best to get them roughly in the middle of their range and use the focusing ring on the eyepiece tube to obtain an average focus before touching it up.

3.5. The resolution improves significantly when the weight of the MonoRad is not borne by the ☐ advanced anamorphic attachment on the HPS. It would be best to use some mechanical means of support when the operator is engaged in the critical task of adjusting the anamorphic settings.

3.6. The light loss through the MonoRad is very large. This will, of course, hurt its application to low contrast imagery. Figures 2 and 3 show the laser setup and the multiple laser reflections that were observed. This indicates that some of the light loss could be eliminated in production versions of the MonoRad. It would be best to test the operational suitability of the concept rather than the prototype by using high contrast imagery for the operational suitability test.

3.7. The optical maintenance technician cleaned the externally accessible optical surfaces. He noted that the inaccessible interior surfaces were very dirty.

4. CONCLUSIONS AND RECOMMENDATION

4.1. TEB has concluded that the MonoRad is suitable for operational suitability testing of the concept.

4.2. TEB has further concluded that the device is not acceptable from an engineering viewpoint. Certain design modifications are in order to correct the various deficiencies reported.



ILLEGIB

Approved For Release 2005/02/17 : CIA-RDP78B04770A001400010014-2

Approved For Release 2005/02/17 : CIA-RDP78B04770A001400010014-2


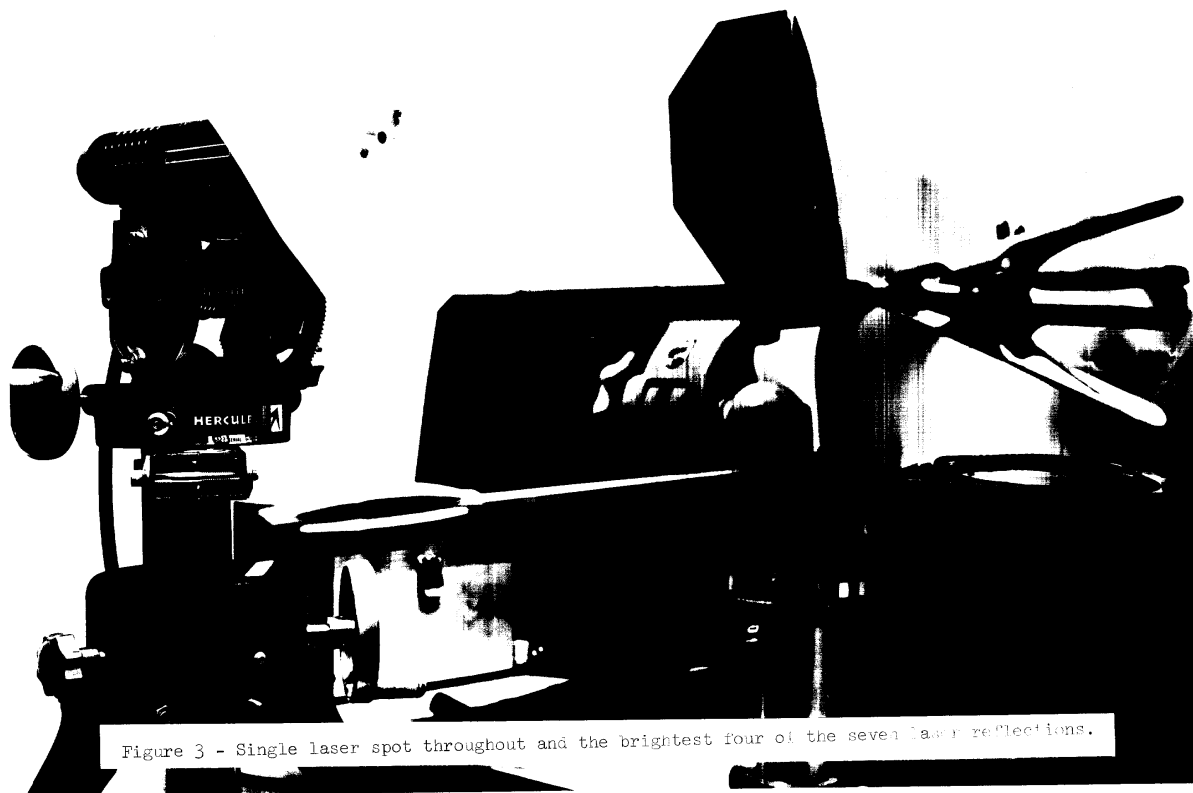


Figure 3 - Single laser spot throughout and the brightest four of the seven laser reflections.

**SECRET**

4.3. If the concept is found to be operationally useful TEB recommends that an improved prototype be produced and tested prior to award of a production contract.



25X1

NPIC/TSSG/ESD/TEB

Distribution:

Orig. -- Addressee

1 -- NPIC/TSSG/ESD

3 -- NPIC/TSSG/ESD/TEB

**SECRET**